




- Used for Gas Measurement Application
- Designed to provide a rigid mount for transmitters and flow computers
- 3/8" bore for unrestricted flow of process gas
- Vertical / Horizontal Mount
- Direct connection with the taps of an orifice fitting and DPT
- Flange X 1/2" NPT(M) Connections
- Quick & easy installation
- Designed to reduce the number of leak points
- Factory assembled & tested
- Dielectric Kits available as an option
- 6000 Psi @ 200°F Rated
- SS316 Standard, CS option available
- P/Ns : ASA-SS : 316SS
ASA-CS : Carbon Steel
- Drawing No. AI-SA-001 Rev 2.00

| REV. | REASON FOR ISSUE | DATE | DRN. | CHKD. | APP. |
|------|------------------|-----------|------|-------|-------|
| 0.00 | REL FOR MFG. | 21.3.2016 | P.S | D.K.D | G.G.J |

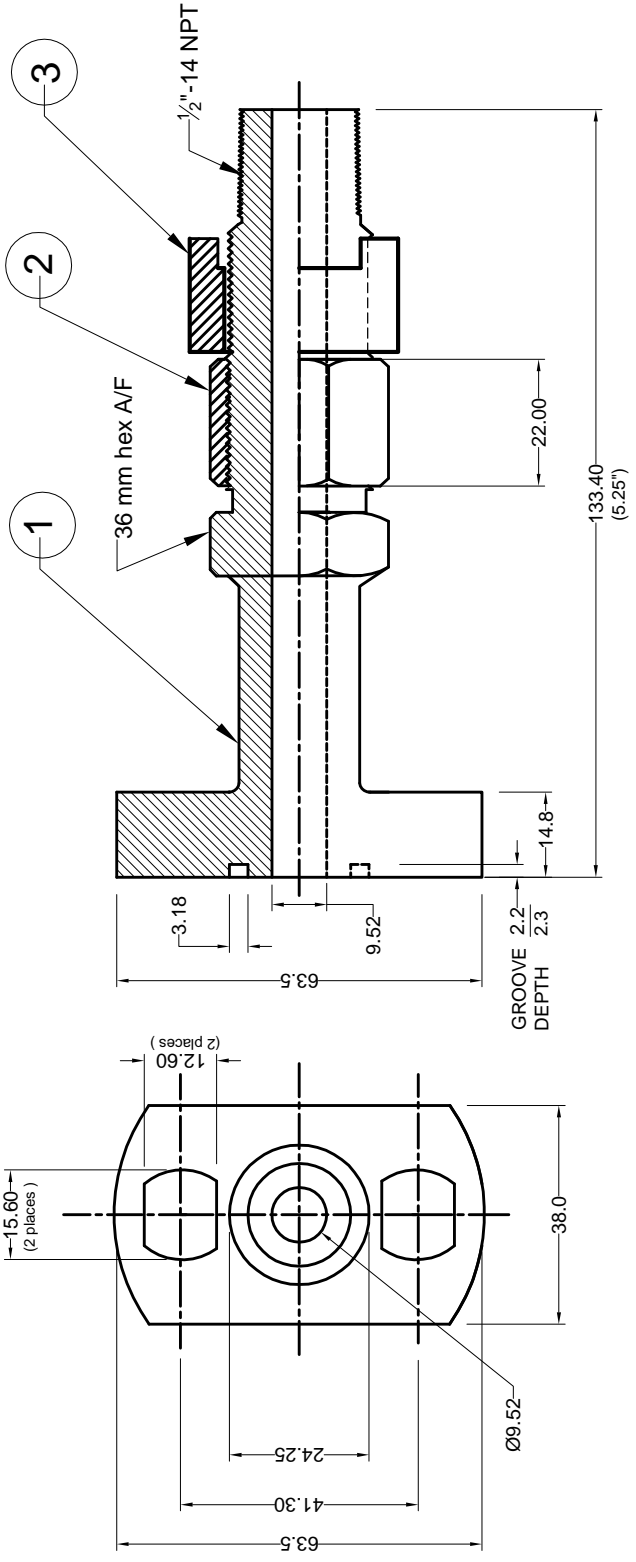

| P/N : | MATERIAL |
|-------|----------|
| JSS | 316SS |
| JSC | C.S |

JVF

15060 West Drive
Houston, TX77053
USA

| ITEM NO | DESCRIPTION | NO OFF | MATERIAL | ORIFICE DIA |
|---------|-------------|--------|---|-------------|
| 1. | BODY | 1 | SS316 ASTM A 479 OR C.S-ZN PLATED | 3/8" |
| 2. | NUT | 1 | | |
| 3. | SPACER | 1 | | |

| | | | | | | |
|------|-----------------|----------|---------|----------|--------------------------|--|
| REV. | DATE OF DRAWING | DRAWN BY | CHECKED | APPROVED | ALL DIMENSIONS ARE IN MM | |
| | | | | | TITLE | |
| 0.00 | 3/21/2016 | P.S | D.K.D | G.G.A | STABILIZER ASSEMBLY | |

ALL DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. TO BE USED FOR REFERENCE ONLY.

This drawing is the property of JVF
Unauthorized reproduction is prohibited.

| | |
|-----------------|------|
| DRG NO :-JS-001 | REV. |
| | 0.00 |